


**YEOSHE**

Relief Valves



PRESSURE CONTROL VALVES
FLOW CONTROL VALVES
MODULAR VALVES

VALVES



Check Valves

CRG	CIT	CP	SG	SV	PF
Check Valves	Check Valves	Pilot Operated Check	Surge Valves	Flang-clamped type,	Prefill Valves
					

Throttle Valves

SR	SRC	SF	TC	Directional Valves	
Throttle Valves	Throttle And Check Valves	Solenoid Operated Flow Controlled Valves	Throttle And Check Module Valves	Manually Operated Directional Valves	Cam Operated Directional Valves
					

Relief Valves

DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						
SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

YEOSHE HYDRAULICS CO., LTD.

**YEOSHE**

1, Alley 29, Lane 190, Jen Ai Rd., Ta Li City Taichung Hsien, Taiwan.

TEL: +886-4-24915518

FAX: +886-4-24910715

China

Add : No.2, Alley 8, Dongshe Hewu New Village, Chongkou, Houjie Town, Dongguan City, Guangdong Province, China

Tel : + 86-769-81635358 + 86-13600266957



Fax : + 86-769-81635359


<http://www.yeoshe.com.tw>[E-mail: yeoshe@ms36.hinet.net](mailto:yeoshe@ms36.hinet.net)




YSDSHE

Relief Valves


DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

Remote Control Relief Valves		Specifications			
		Model	Max. Operated Pressure kgf/cm ²	Rated Flow LPM	Weight kgs
		DG-01	250	2	1.6
		DT-01	250	2	1.5

DG-01


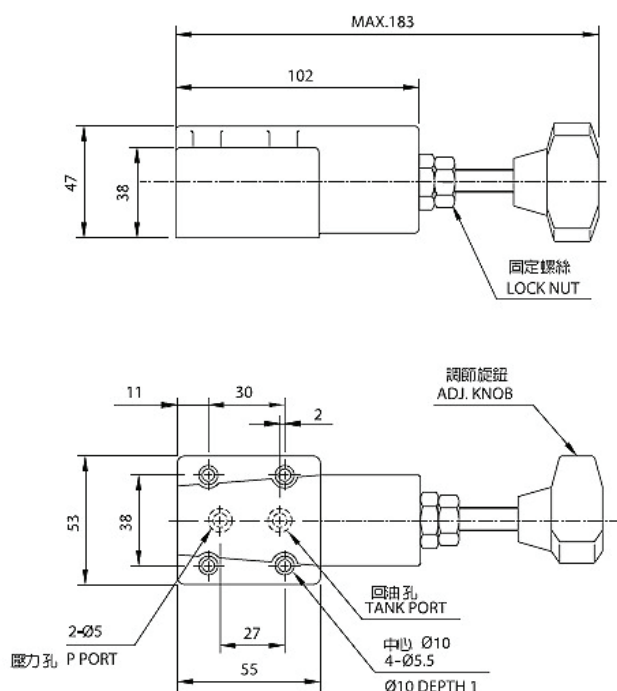



DT-01

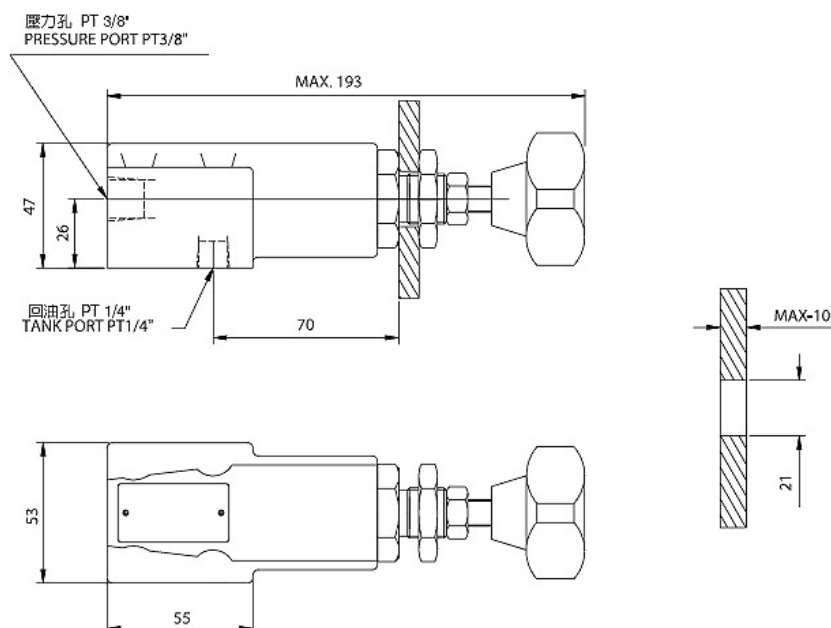

**YSDSHE**



Relief Valves

Relief Valves						
DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

Direct Type Relief Valves		Specifications			
		Model	Max. Operated Pressure kgf/cm ²	Rated Flow LPM	Weight kgs
		DG-02	250	16	1.6
		DT-02	250	16	1.5



Order No.		
Series	Size	Checking Pressure
DG-	01-	1
DG : SUB-PLATE MOUNTING DT : THREADED CONNECTIONS	02: 1/4"	1: 7~70kgf/cm ² 2: 35~140kgf/cm ² 3: 70~250kgf/cm ²


DG-02 has M5 45L 4pcs

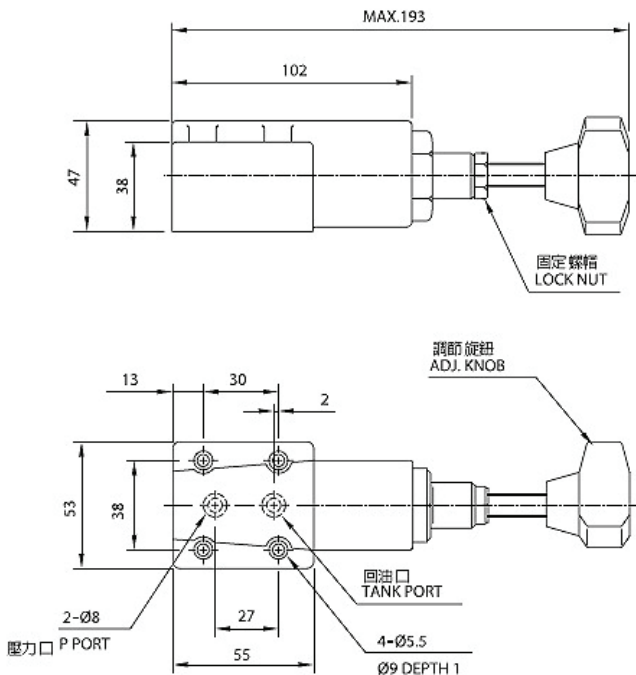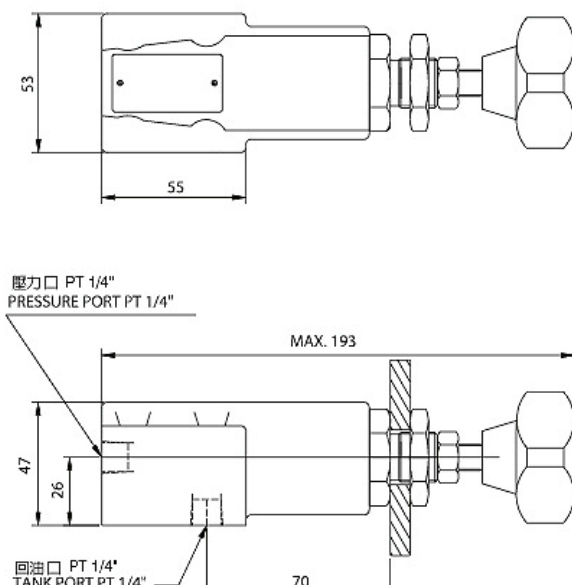DG-02	DT-02
 MAX.193 102 47 38 固定螺帽 LOCK NUT 調節旋鈕 ADJ. KNOB 13 30 2 53 38 2-Ø8 壓力口 P PORT 27 55 4-Ø5.5 回油口 TANK PORT Ø9 DEPTH 1	 53 55 壓力口 PT 1/4" PRESSURE PORT PT 1/4" MAX. 193 47 26 回油口 PT 1/4" TANK PORT PT 1/4" 70

**YEOSHE**

Relief Valves

Relief Valves						
DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

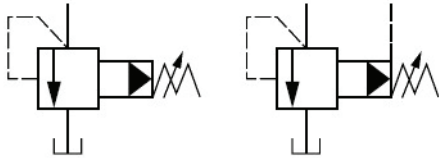Pilot Operated Relief Valves			Specifications			
			Model	Max. Operated Pressure kgf/cm ²	Rated Flow LPM	Weight kgs
			BG-03	250	100	5.4
			BG-06	250	200	6.8
			BG-10	250	400	10.5



Order No.		
Series	Size	Checking Pressure
BG-	03-	1
BG: RELIEF VALVE MOUNTING (G : SUB-PLATE MOUNTING)	03: 3/8" 06: 3/4" 10: 1-1/4"	1: 7~70kgf/cm ² 2: 35~140kgf/cm ² 3: 70~250kgf/cm ²

BG-03 has M12 70L 2pcs & M12 95L 2pcs



BG-06 has M16 60L 2pcs & M16 80L 2pcs

BG-10 has M20 70L 2pcs & M20 90L 2pcs

BG-03

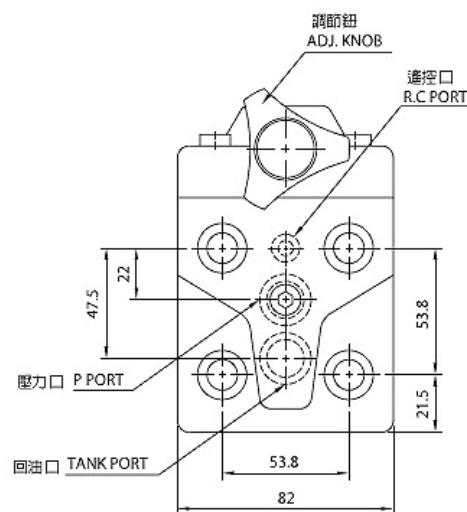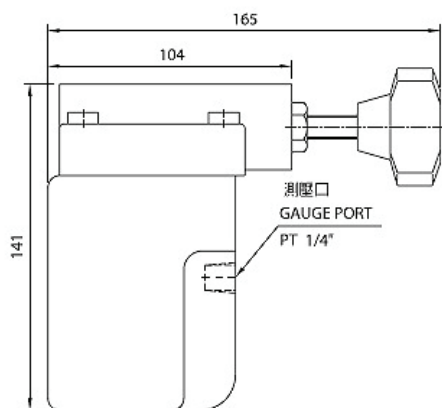



BG-06,10

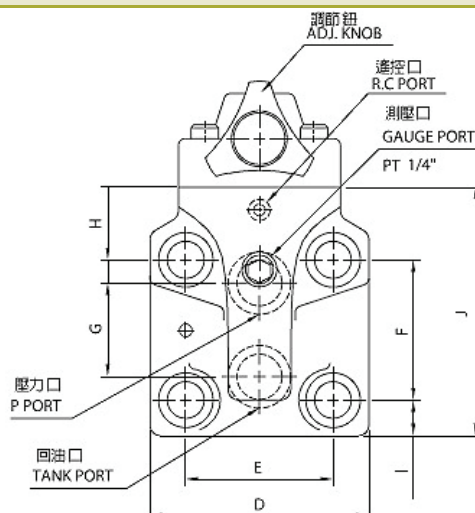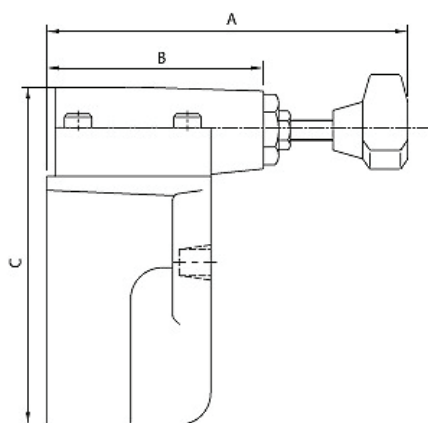


Model	A	B	C	D	E	F	G	H	I	J
BG-06	175	104	160	104	70	66.7	44.5	11	19.5	122
BG-10	184	120	195	125	82.6	88.9	63.6	12.7	18.5	150

**YEOSHE**



Relief Valves

Relief Valves						
DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

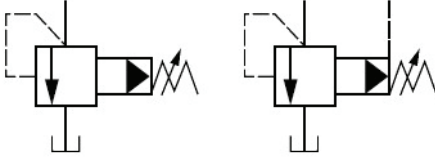Pilot Operated Relief Valves		Specifications			
		Model	Max. Operated Pressure kgf/cm2	Rated Flow LPM	Weight kgs
		RVT-04	250	100	2.4
		RVT-06	250	200	4.3
		RVT-10	250	400	6.6

Order No.


Series	Size	Checking Pressure
RVT-	03-	1
RVT: Pilot Operated Relief Valves (T: THREADED CONNECTIONS)	04: 1/2" 06: 3/4" 10: 1-1/4"	1: 7~70kgf/cm2 2: 35~140kgf/cm2 3: 70~250kgf/cm2
RVT-04,06,10		

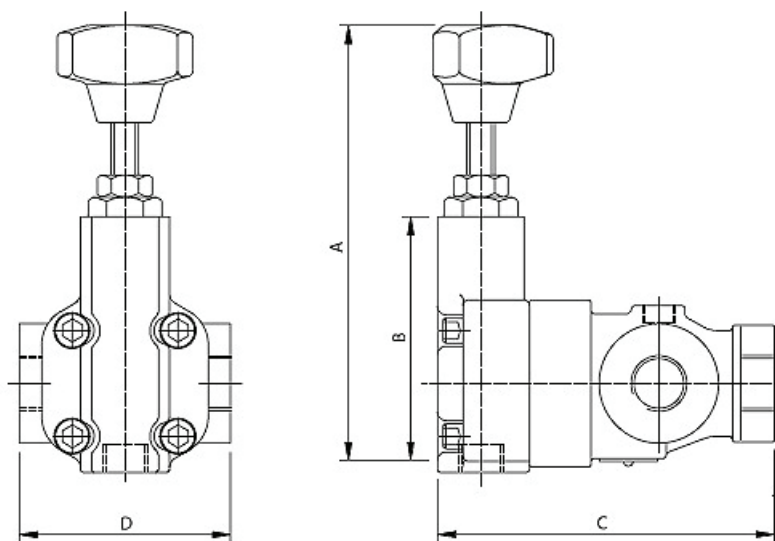
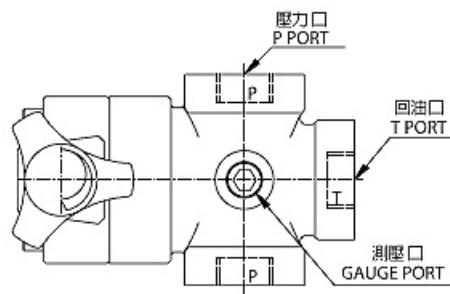


Model	A	B	C	D	P PORT	T PORT	G PORT
RVT-04	MAX. 142	92	111	84.5	PT1/2	PT1/2	PT1/4
RVT-06	MAX. 148	102	140	103	PT3/4	PT3/4	PT1/4
RVT-10	MAX. 141	120	183	120	PT1-1/4	PT1-1/4	PT1/4


**YEOSHE**

Relief Valves

DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

Low Noise Type Pilot Operated Relief Valves			Specifications			
			Model	Max. Operated Pressure kgf/cm2	Rated Flow LPM	Weight kgs
			SBG-03	250	100	4.8
			SBG-06	250	200	5.9
			SBG-10	250	400	11.3

Order No.			
Series	Size	Checking Pressure	DIRECTION OF KNOB
SBG-	03-	1	R
SBG: Low Noise Type Pilot Operated Relief Valves (G : SUB-PLATE MOUNTING)	03: 3/8" 06: 3/4" 10: 1-1/4"	1: 7~70kgf/cm2 2: 35~140kgf/cm2 3: 70~250kgf/cm2	R : RIGHT (P PORT SIDE) L : LEFT (T PORT SIDE)
SBG-03 has M12 40L 2pcs SBG-06 has M16 45L 2pcs SBG-10 has M20 60L 2pcs			
SBG-03,06,10			


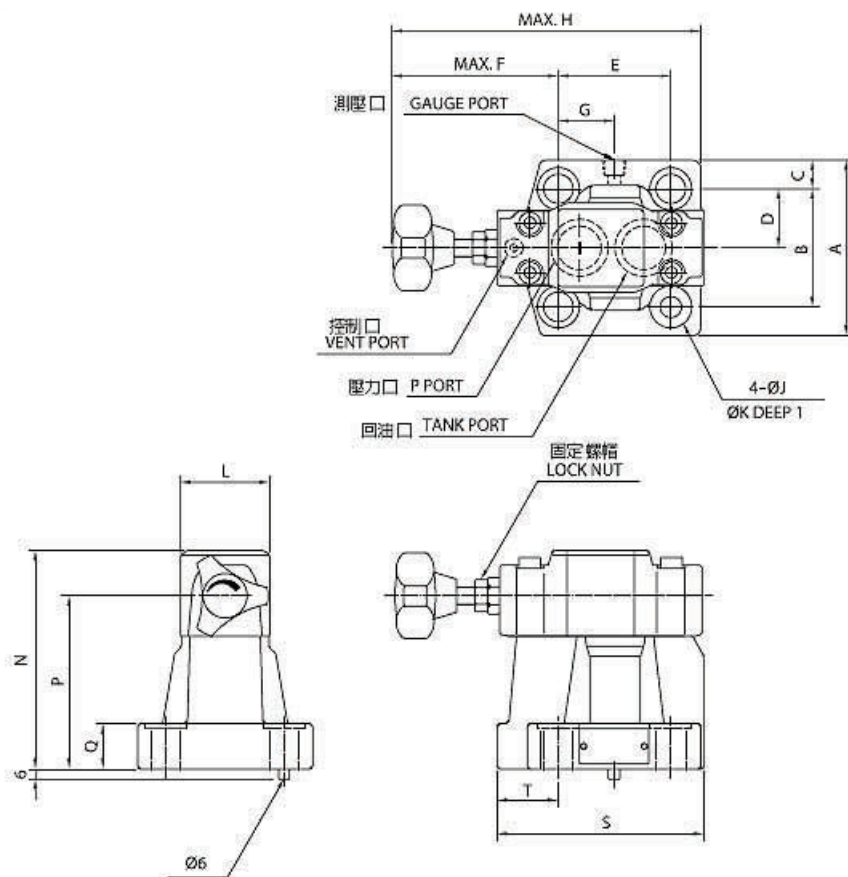


Model	A	B	C	D	E	F	G	H	J	K	L	N	P	Q	S
SBG-03	76	53.8	11.1	26.9	53.8	114	27	171	13.5	21	51	132	104	22	106
SBG-06	104	70	17	35	66.7	98.8	33.7	171	17.5	25	51	132	1004	27	123
SBG-10	120	82.6	18.7	41.3	88.9	58.6	44.9	188	21.5	32	65	167	135	33.5	155

**YEOSHE**

Relief Valves

Relief Valves						
DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						


Solenoid Controlled Relief Valves	
	 

Specifications				
Model	Max. Operated Pressure kgf/cm ²	Rated Flow LPM	Weight kgs	
			G	T
BS*-03	250	100	5.5	
BS*-06	250	200	7.1	4.7
BS*-10	250	400	11.8	7.9

Order No.				
Series	Mounting	Size	Type	Checking Pressure
BS	G-	03-	1PN	1
BS: Solenoid Controlled Relief Valves	G : sub-plate mounting T : threaded connections	03: 3/8" 06: 3/4" 10: 1-1/4"	1PN : normally vented 1NP : energized to vent	1: 7~70kgf/cm ² 2: 35~140kgf/cm ² 3: 70~250kgf/cm ²

BSG-03 has M12 70L 2pcs & M12 95L 2pcs
 BSG-06 has M16 60L 2pcs & M16 80L 2pcs
 BSG-10 has M20 70L 2pcs & M20 90L 2pcs

Dimensions
BSG-03,06,10 BST-06,10

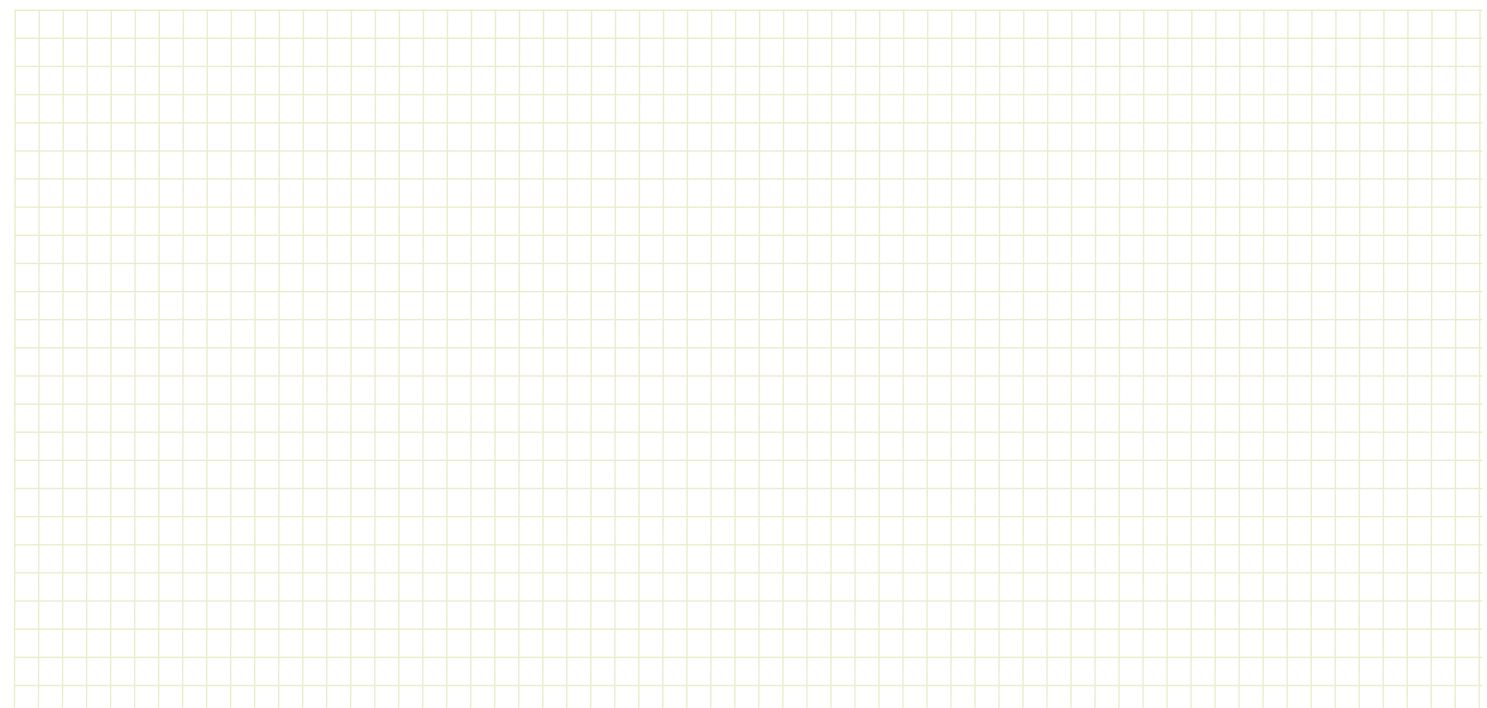


**YEOSHE**

Relief Valves

Relief Valves


DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

BSG-03,06,10

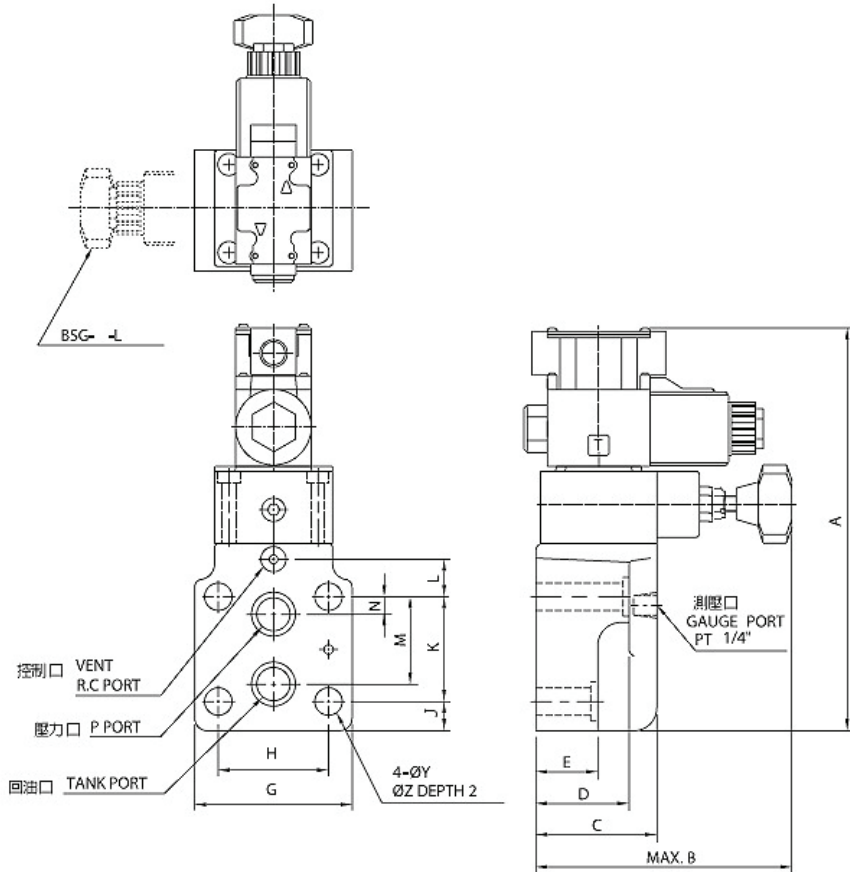

Model	A	B	C	D	E	G	H	J	K	L	M	N	Y	Z
BSG-03	229	175	78	78	57	82	53.8	21.5	53.8	0	47.5	22	13.5	21
BSG-06	254	175	78	60	40	104	70	19	66.7	23.8	55.5	11	17.5	26
BSG-10	281	184	87.5	67	47	125	82.6	18.5	88.9	31.8	76.2	12.7	22	32

BST-06,

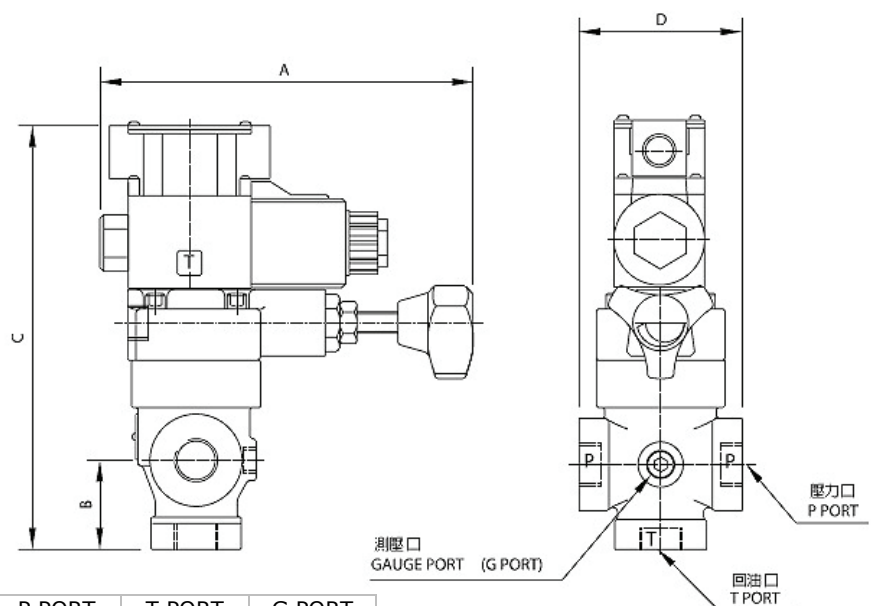


Model	A	B	C	D	P PORT	T PORT	G PORT
BST-06	MAX. 148	51	234	106	PT3/4	PT3/4	PT1/4
BST-10	MAX. 151	68	267	130	PT1-1/4	PT1-1/4	PT1/4







YEOSHE

Relief Valves

Relief Valves						
DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

Solenoid Controlled Relief Valves

	 2P	 2PN	 3P
---	---	--	--

Specifications

Model	Max. Operated Pressure kgf/cm ²	Rated Flow LPM	Weight kgs	
			G	T
BS*-03	250	100	8.9	
BS*-06	250	200	9.1	7.0
BS*-10	250	400	14	

Order No.

Series	Mounting	Size	Type	Checking Pressure
BS	G-	06-	2PN	1
BS: Solenoid Controlled Relief Valves	G : sub-plate mounting T : threaded connections	03: 3/8" 06: 3/4" 10: 1-1/4"	2P : dual pressure adjusting ranges 2PN : dual pressure and vent 3P : three pressure adjusting ranges	1: 7~70kgf/cm ² 2: 35~140kgf/cm ² 3: 70~250kgf/cm ²


BSG-03 has M12 70L 2pcs & M12 95L 2pcs

BSG-06 has M16 60L 2pcs & M16 80L 2pcs

BSG-10 has M20 70L 2pcs & M20 90L 2pcs

Dimensions



BSG-03,06,10-2P | BSG-03,06,10-2PN | BSG-03,06,10-3P | BST-06-2P/2PN/3P

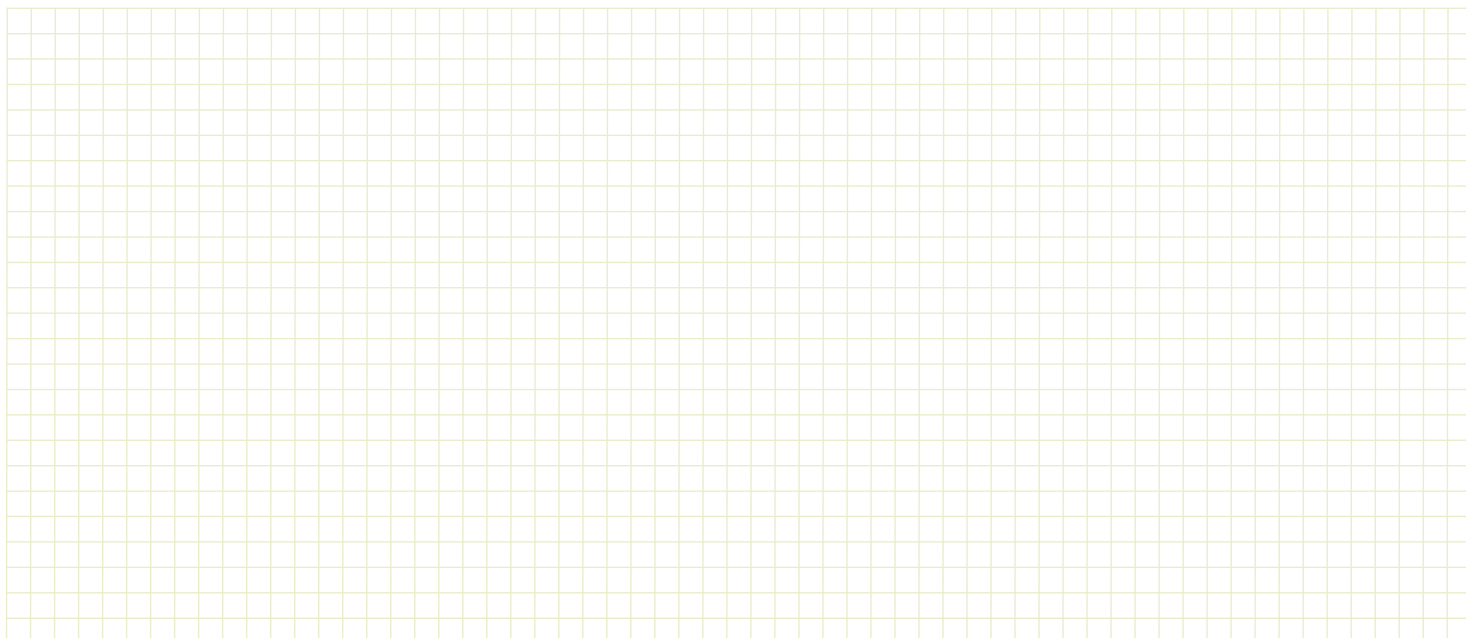


**YSDSHE**

Relief Valves

Relief Valves


DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

BSG-03,06,10-2P

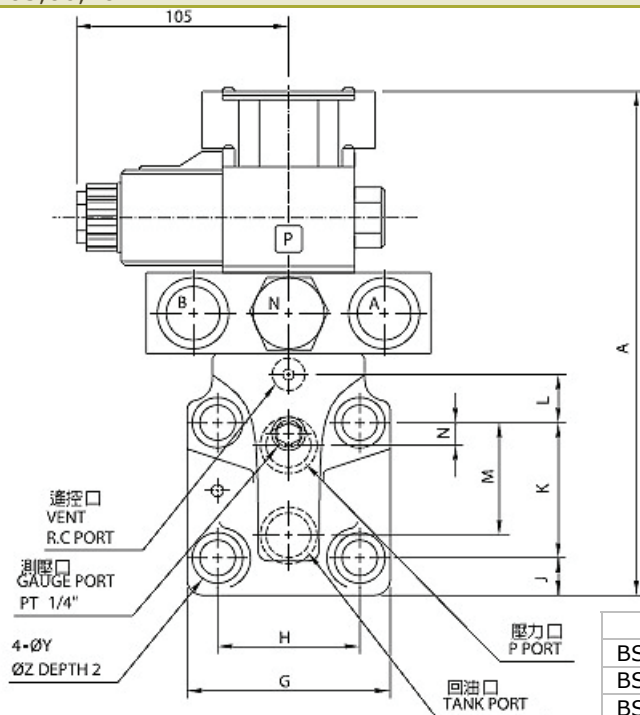

Model	A	G	H	J	K	L	M	N	Y	Z
BSG-03-2P	219	82	53.8	21.5	53.8	0	47.5	22	13.5	21
BSG-06-2P	244	104	70	19.5	66.7	23.8	55.5	11	17.5	26
BSG-10-2P	281	124	82.6	18.5	88.9	31.8	76.2	12.7	21.5	32

BSG-03,06,10-2PN

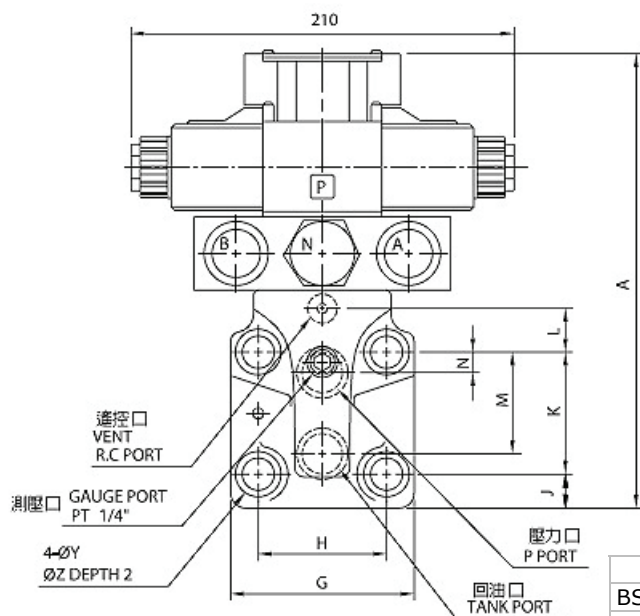


Model	A	G	H	J	K	L	M	N	Y	Z
BSG-03-2PN	219	82	53.8	21.5	53.8	0	47.5	22	13.5	21
BSG-06-2PN	244	104	70	19.5	66.7	23.8	55.5	11	17.5	26
BSG-10-2PN	281	125	82.6	18.5	88.9	31.8	76.2	12.7	21.5	32




YEOSHE

Relief Valves


Relief Valves						
DG	DT	BG	RVT	SBG	BS	BS
Remote Control Relief Valves	Direct Type Relief Valves	Pilot Operated Relief Valves	Pilot Operated Relief Valves	Low Noise Type Pilot Operated Relief Valves	Solenoid Controlled Relief Valves	Solenoid Controlled Relief Valves
						

BSG-03,06,10-3P

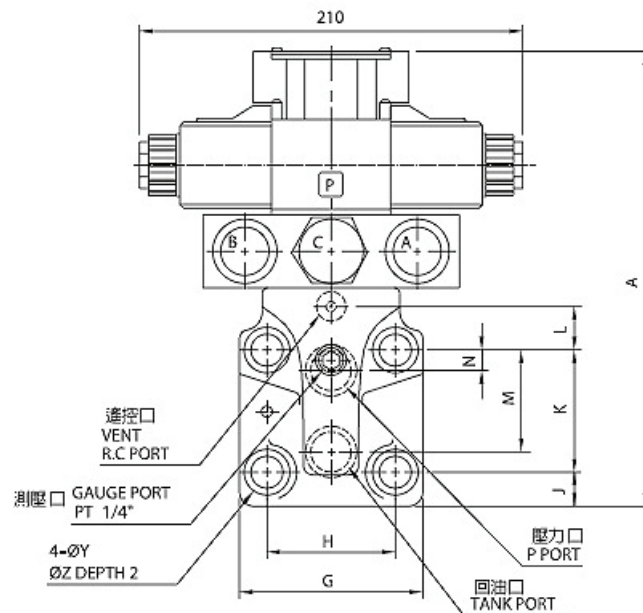

Model	A	G	H	J	K	L	M	N	Y	Z
BSG-03-3P	219	82	53.8	21.5	53.8	0	47.5	22	13.5	21
BSG-06-3P	244	104	70	19.5	66.7	23.8	55.5	11	17.5	26
BSG-10-3P	281	125	82.6	18.5	88.9	31.8	76.2	12.7	21.5	32

BST-06-2P/2PN/3P

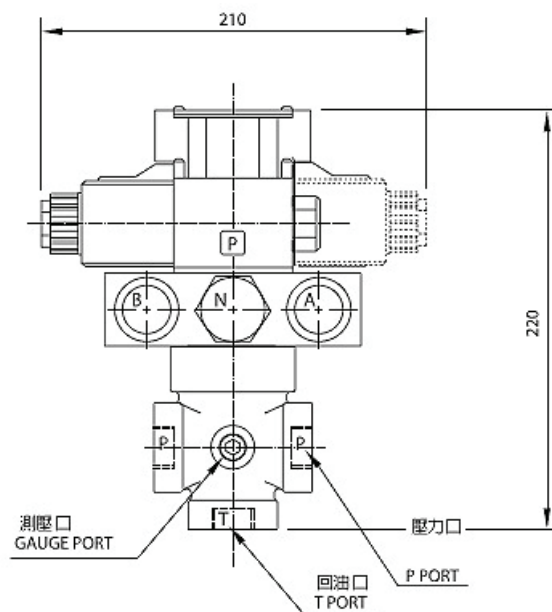

**YSDSHE**



Relief Valves

Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

Low Noise Type Solenoid Controlled Relief Valves




Specifications

					Model	Max. Operated Pressure kgf/cm ²	Rated Flow LPM	Weight kgs
	1PN		1NP		SBSG-03	250	100	4.8
					SBSG-06	250	200	5.9
					SBSG-10	250	400	11.3

Order No.

Series	Size	Checking Pressure	DIRECTION OF KNOB
SBSG-	03-	1	R
SBSG: Low Noise Type Pilot Operated Relief Valves (G : SUB-PLATE MOUNTING)	03: 3/8" 06: 3/4" 10: 1-1/4"	1: 7~70kgf/cm ² 2: 35~140kgf/cm ² 3: 70~250kgf/cm ²	R : RIGHT (P PORT SIDE) L : LEFT (T PORT SIDE)
SBSG-03 has M12 40L 4pcs SBSG-06 has M16 45L 4pcs SBSG-10 has M20 60L 4pcs			
SBSG-03,06,10			

Model	A	B	C	D	E	F	G	H	J
SBSG-03	76	53.8	11.1	26.9	53.8	96	27	180	13.5
SBSG-06	104	70	17	35	66.7	98.8	33.7	180	17.5
SBSG-10	120	82.6	18.7	41.3	88.9	100	44.9	182	21.5
Model	K	L	N	P	Q	S	T	U	V
SBSG-03	21	48	221	207	157	132	104	22	106
SBSG-06	25	48	221	207	157	132	104	27	123
SBSG-10	32	65	248	238	192	167	135	33.5	155

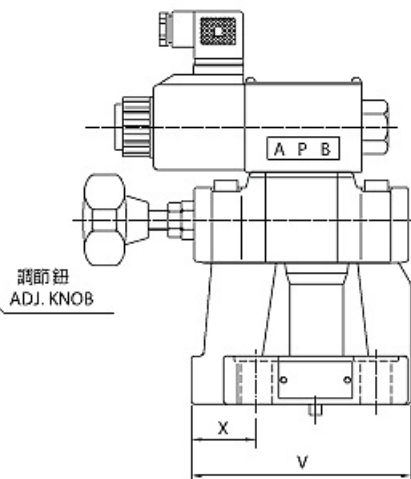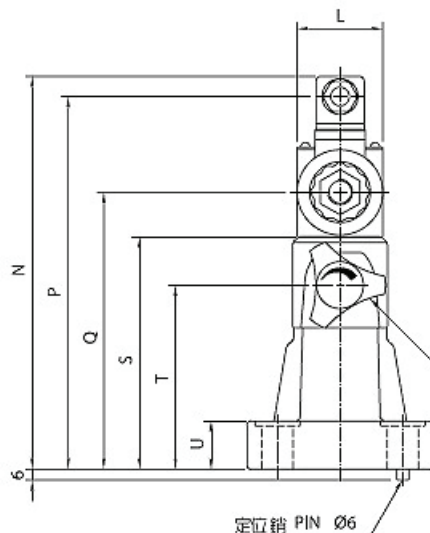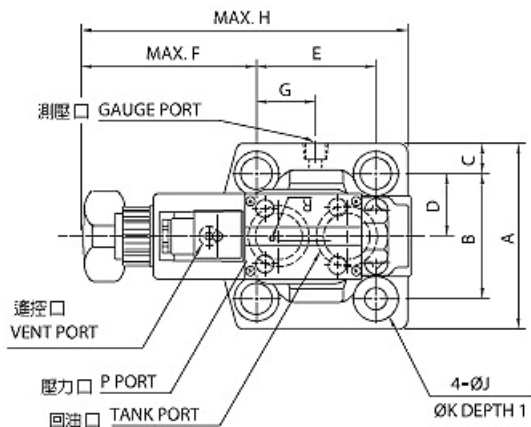


**YSDSHE**

Relief Valves

Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

Back Valve

 	Specifications			
	Model	Max. Operated Pressure kgf/cm2	Rated Flow LPM	Weight kgs
	RFBG-04	250	100	7.0
	RFBG-06	250	200	11.2
	RFBG-10	250	400	11.6

Order No.



Series	Size	Checking Pressure
RFBG-	04-	1
RFBG: Low Noise Type Pilot Operated Relief Valves (G : SUB-PLATE MOUNTING)	04: 1/2" 06: 3/4" 10: 1-1/4"	1: 7~70kgf/cm ² 2: 35~140kgf/cm ² 3: 70~250kgf/cm ²

RFBG-04 has M12 110L 2pcs & M12 135L 2pcs



RFBG-06 has M16 120L 2pcs & M16 140L 2pcs

RFBG-10 has M20 145L 2pcs & M20 165L 2pcs



RFBG-04

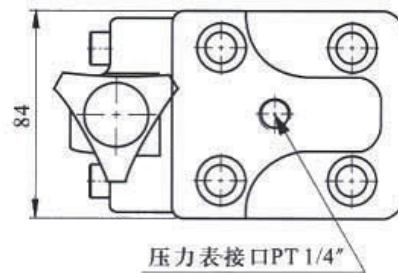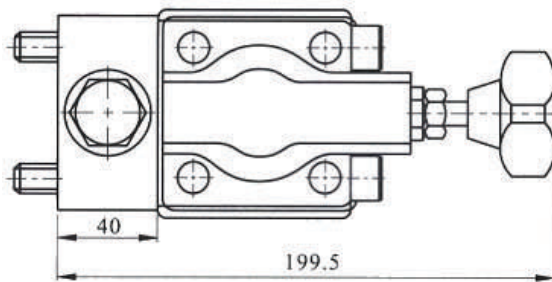

RFBG-06

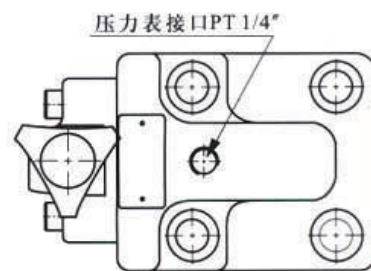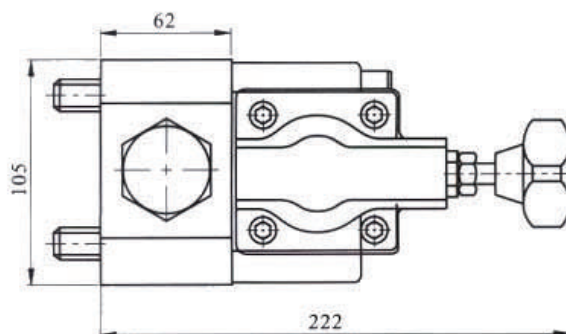

RFBG-10







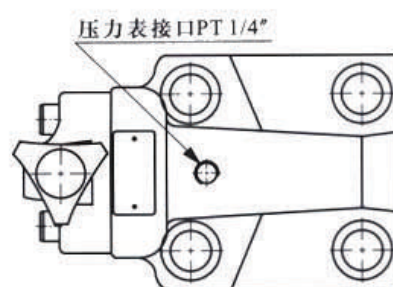
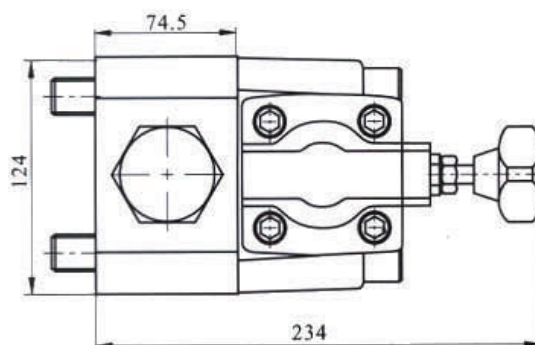




YEOSHE

Relief Valves

Relief Valves						
SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						
H.Type Pressure Control Valves		Specifications				
		Model	Max. Operated Pressure kgf/cm2	Rated Flow LPM	Weight kgs	
					G	T
		H*-03	210	50	3.7	4.3
		H*-06	210	125	6.2	6.5
		H*-10	210	250	12.0	10.8
Order No.						
Series	Mounting	Size	Checking Pressure	Valve Type		
H	G-	06-	A	1		
H: H.Type Pressure Control Valves	G : sub-plate mounting T : threaded connections	03: 3/8" 06: 3/4" 10: 1-1/4"	A: 18~35kgf/cm2 B: 35~70kgf/cm2 C: 70~140kgf/cm2	1 : internal pilot & drain 2 : internal pilot external drain 3 : external drain & pilot 4 : external pilot internal drain		

No.	Valve Type	Pilot drain type	Activity diagram	Symbol
1	Low pressure valve type sure relief valve	Internal pilot internal drain		
2	Sequence valve	Internal. pilot external drain		
3	Sequence valve	External pilot external drain		
4	Unloading relief valve	External pilot internal drain		




Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

Dimensions

HT-03,06,10 | HG-03,06 | HG-10

HT-03,06,10

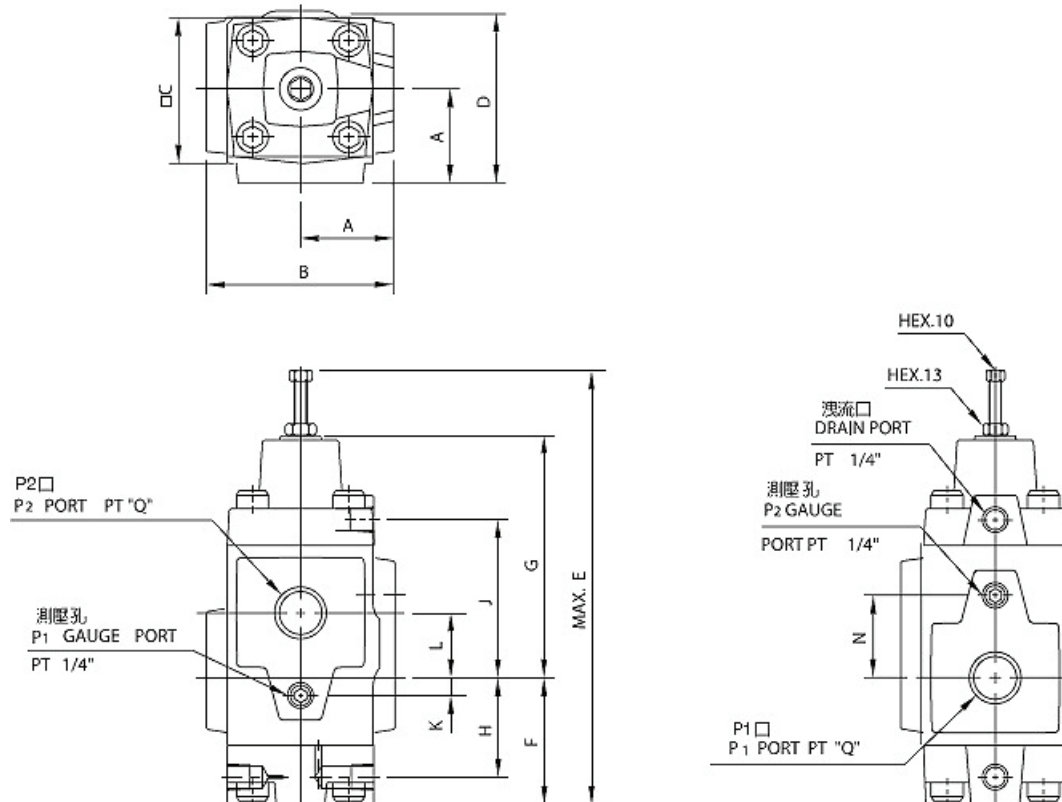




Model	A	B	C	D	E	F	G	H	J	K	L	N	Q
HT-03	42	84	61	74	195	57	106	43	70	0	28	28	3/8"
HT-06	48	96	73	86	219	64.5	124	50.5	80	9	33	42	3/4"
HT-10	68.5	137	84	103	272	84	149	66	98	12	40	52	1 1/4"



Relief Valves




SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

HG-03,06

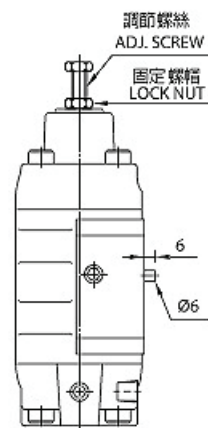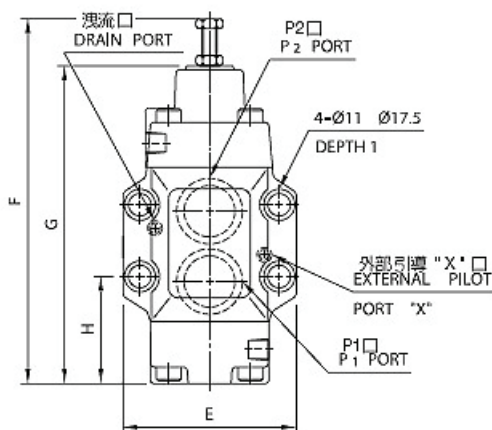










Model	A	B	C	D	E	F	G	H
HG-03	60	67	41.7	39	89	195	170.3	52.3
HG-06	73	81	41.5	39	102	219	192	51

HG-10

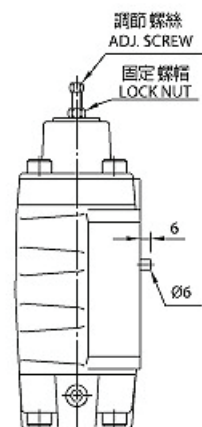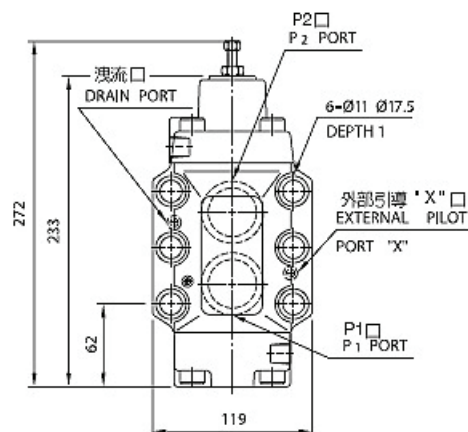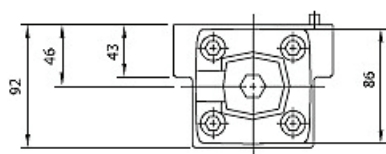



Relief Valves									
SBSG	RFBG	H	HC	R	RC				
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves				
									
HC.Type Pressure Control Valves			Specifications						
		Model	Max. Operated Pressure kgf/cm2	Rated Flow LPM	Weight kgs				
					G	T			
					HC*-03	210	50	4.8	4.2
					HC*-06	210	125	7.8	7.5
		HC*-10	210	250	13.8	13.8			
Order No.									
Series	Mounting	Size	Checking Pressure	Valve Type					
HC	G-	06-	A	1					
HC: HC.Type Pressure Control Valves	G : sub-plate mounting T : threaded connections	03: 3/8" 06: 3/4" 10: 1-1/4"	A: 18~35kgf/cm2 B: 35~70kgf/cm2 C: 70~140kgf/cm2	1 : internal pilot & drain 2 : internal pilot external drain 3 : external drain & pilot 4 : external pilot internal drain					

No.	Valve Type	Pilot drain type	Activity diagram	Symbol
1	Low pressure valve type sure relief valve	Internal pilot internal drain		
2	Sequence valve	Internal. pilot external drain		
3	Sequence valve	External pilot external drain		
4	Unloading relief valve	External pilot internal drain		

**YEOSHE**

Relief Valves


Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

Dimensions

HCT-03,06,10 | HCG-03,06 | HCG-10

HCT-03,06,10

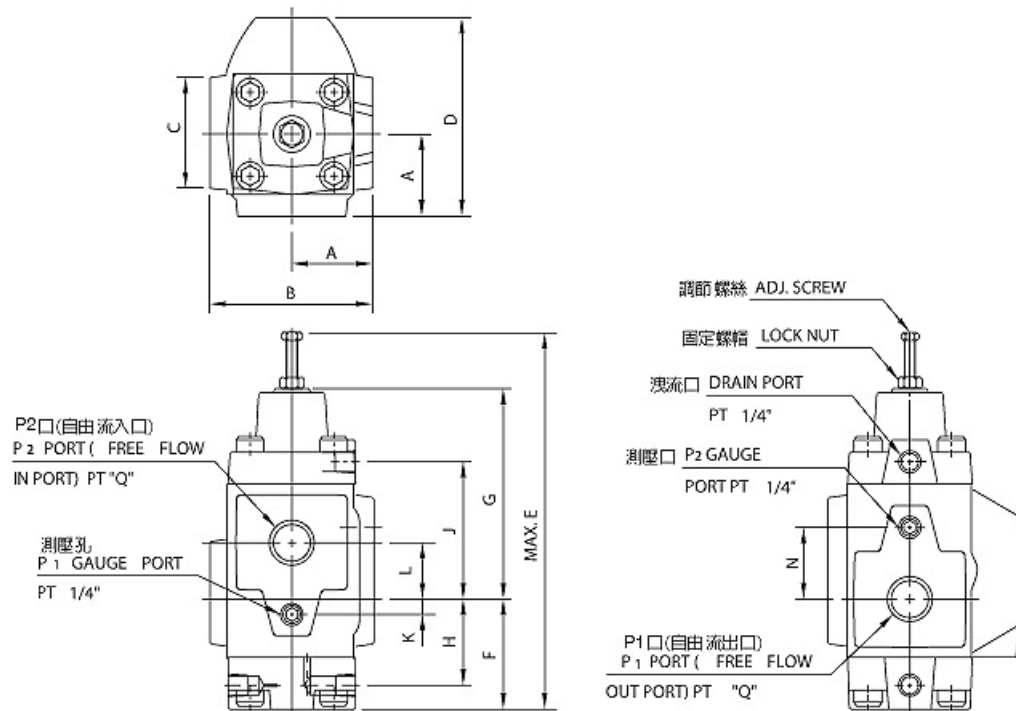

Model	A	B	C	D	E	F	G	H	J	K	L	N	Q
HT-03	41	82	63	96	194	59	110	43	70	0	28	28	3/8"
HT-06	50	100	76	118	118	64.5	124	50.5	80.5	9	33	42	3/4"
HT-10	68.5	137	84	156	156	84	149	66	98	12	40	52	1 1/4"


**YEOSHE**

Relief Valves

Relief Valves


SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

HCG-03,06

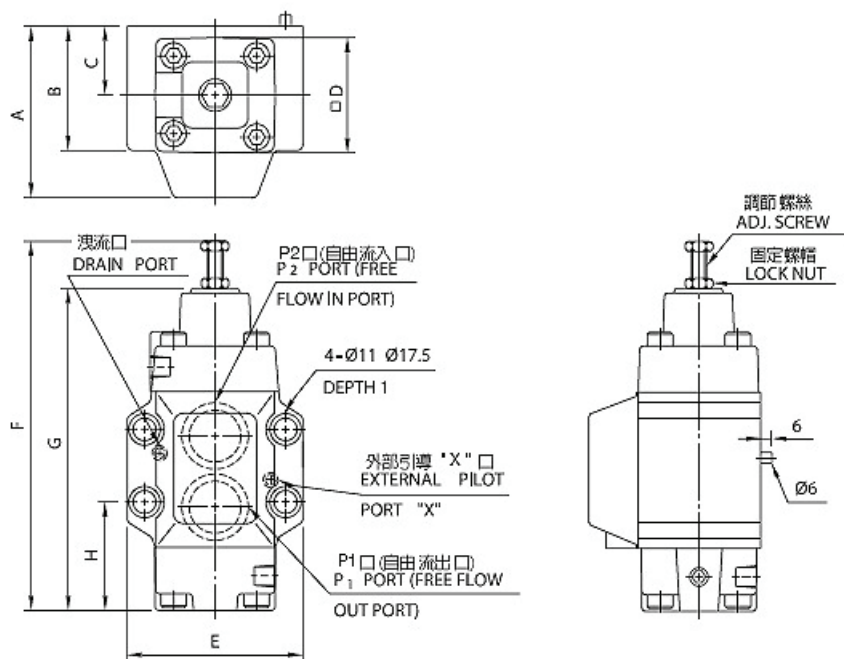

Model	A	B	C	D	E	F	G	H
HG-03	89	59	35	60	89	191	170	54
HG-06	108	69	40	73	102	221	188	51

HCG-10

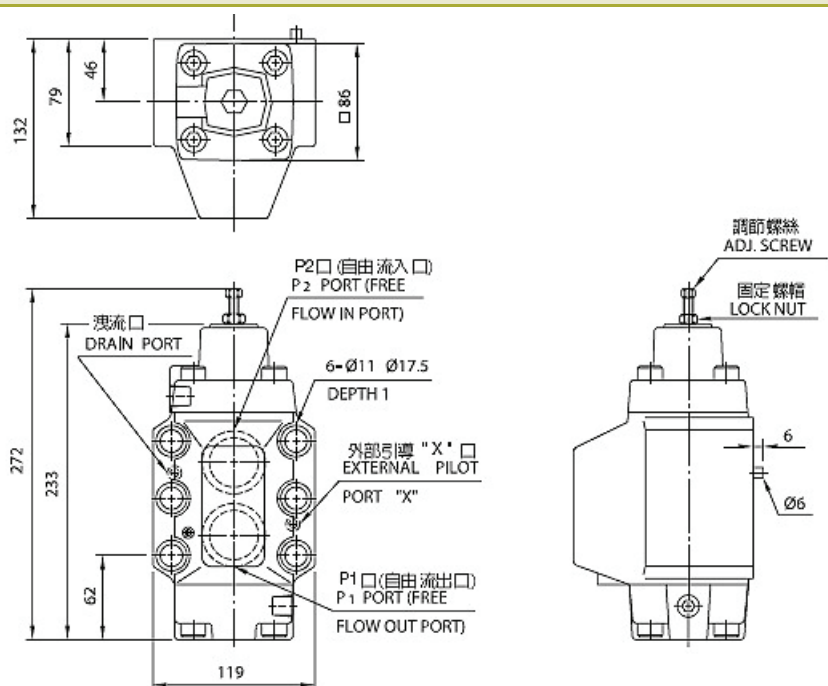



YSDSHE


Relief Valves

Relief Valves						
SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

HC.Type Pressure Control Valves

HGM-03 | HGM-06 | HGM-10

HGM-03

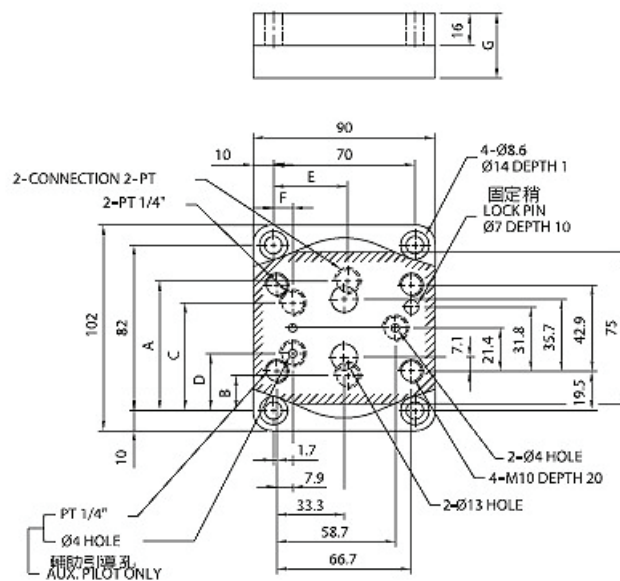


THIS SUB-PLATE IS USED FOR HG/HCG-03. CPG/CPDG-03. RG/RCG-03 VALVES.

Model	PORT PT	A	B	C	D	E	F	G
HGM-03-03	3/8"	61	21	40.9	28.5	35	9.6	32
HGM-03-04	1/2"	61	21	40.9	28.5	35	9.6	32

Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						


HGM-06

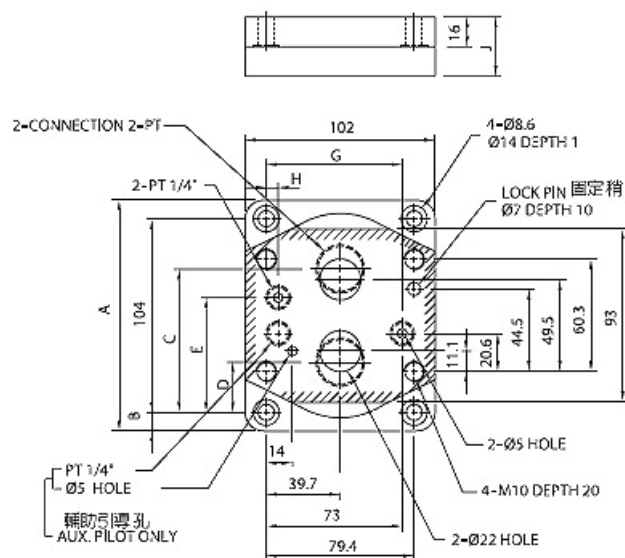

THIS SUB-PLATE IS USED FOR HG/HCG-06. CPG/CPDG-06. RG/RCG-06 VALVES.

Model	PORT PT	A	B	C	D	E	G	H	J
HGM-06-06	3/4"	124	10	77	27	61.7	73	6.4	36
HGM-06-08	1"	136	16	82.3	22	61.7	73	6.4	45

HGM-10

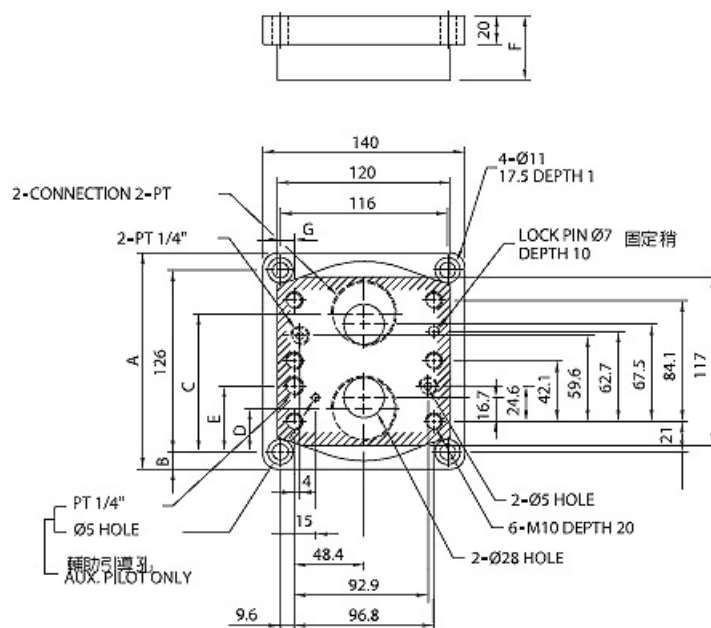

THIS SUB-PLATE IS USED FOR HG/HCG-10. CPG/CPDG-10. RG/RCG-10 VALVES.

Model	PORT PT	A	B	C	D	E	F	G
HGM-10-10	1-1/4"	150	12	96	30	43	45	13.6
HGM-10-12	1-1/2"	177	25.5	104	22	43	50	13.6

**YEOSHE**





Relief Valves




Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

Pressure Reducing Valves

RG-03,06

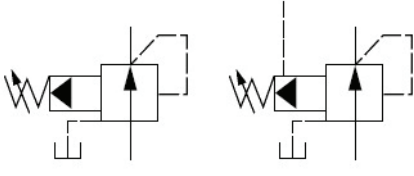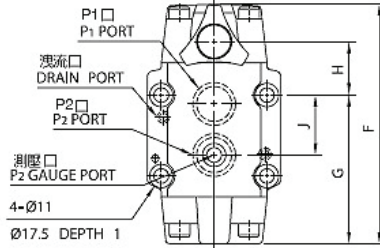									
Order No.									
Series	Mounting	Size	Checking Pressure						
R	G-	03-	1						
R: Pressure Reducing Valves	G : sub-plate mounting T : threaded connections	03: 3/8" 06: 3/4" 10: 1-1/4"	1: 7~70kgf/cm2 2: 35~140kgf/cm2 3: 70~210kgf/cm2						
Specifications									
Model	Max. Operated Pressure kgf/cm2	Rated Flow LPM	Weight kgs						
			G	T					
R*-03	210	50	4.3	4.5					
R*-06	210	125	6.0	6.8					
R*-10	210	250	12.0	11.0					
Dimensions									
RG-03,06 RG-10 RT-03 RT-06,10									
RG-10									

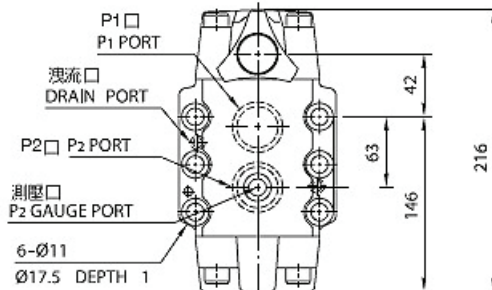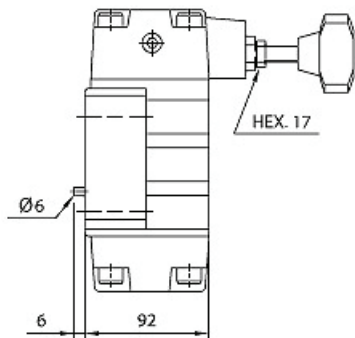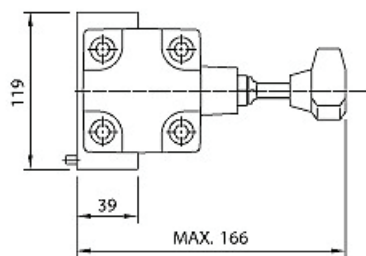


**YEOSHE**

Relief Valves


Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

RT-03

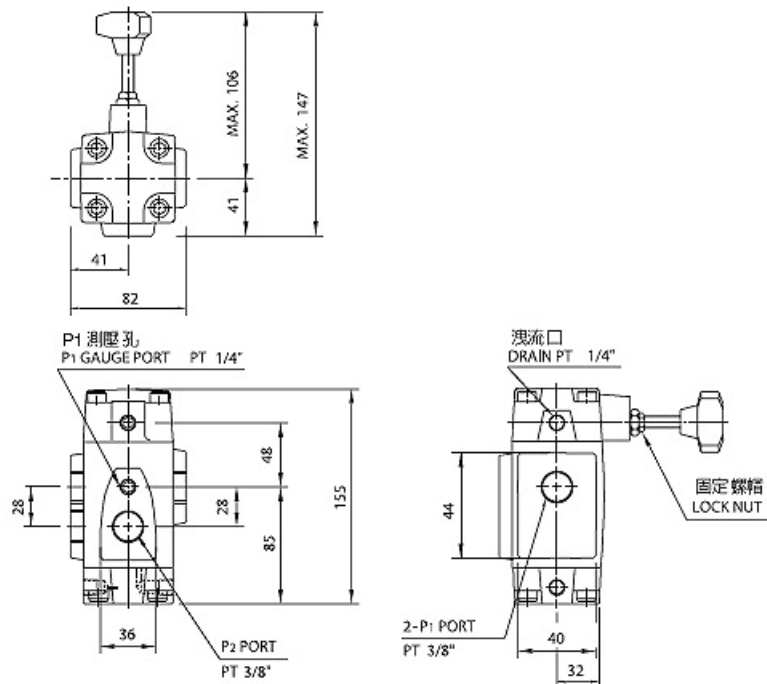

RT-06,10

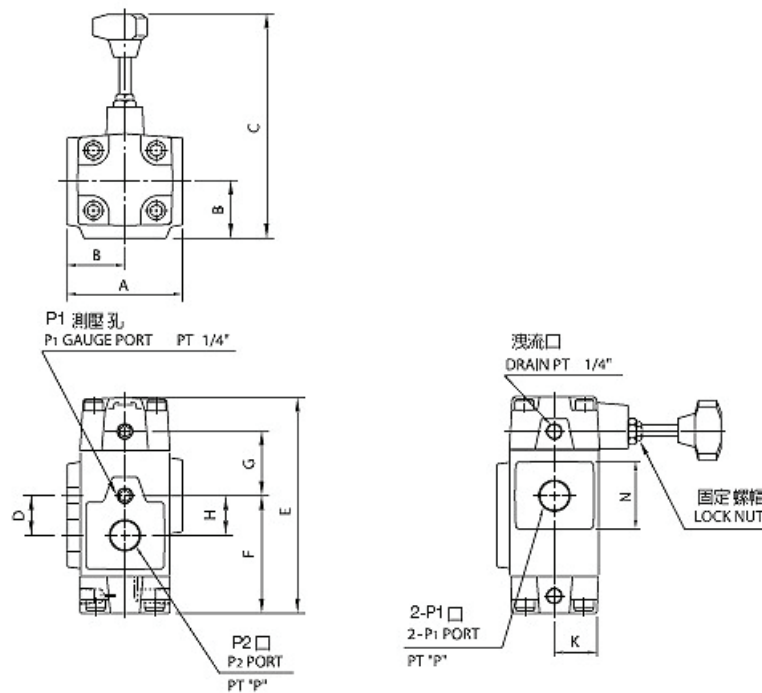

Model	A	B	C	D	E	F	G	H	K	N	P
RT-06	94.8	48	150	42	179	97	53.5	33	39	62	3/4"
RT-10	132	66	167	51	216	124	64	40	50	79	1-1/4"

**YEOSHE**

Relief Valves

Relief Valves

SBSG	RFBG	H	HC	R	RC	
Low Noise Type Solenoid Controlled Relief Valves	Back Valve	H.Type Pressure Control Valves	HC.Type Pressure Control Valves	Pressure Reducing Valves	Pressure Reducing And Check Valves	
						

Pressure Reducing And Check Valves

	Specifications			
	Model	Max. Operated Pressure kgf/cm ²	Rated Flow LPM	Weight kgs
				G T
	RC*-03	210	50	4.8 5.2
	RC*-06	210	125	7.8 8.3
	RC*-10	210	250	14.4 13.4




Order No.

Series	Mounting	Size	Checking Pressure
RC	G-	04-	1
RC: Pressure Reducing And Check Valves	G : sub-plate mounting T : threaded connections	03: 3/8" 06: 3/4" 10: 1-1/4"	1: 7~70kgf/cm ² 2: 35~140kgf/cm ² 3: 70~210kgf/cm ²

Dimensions

RCG-03,06 | RCG-10 | RCT-03 | RCT-06,10


RCG-03,06

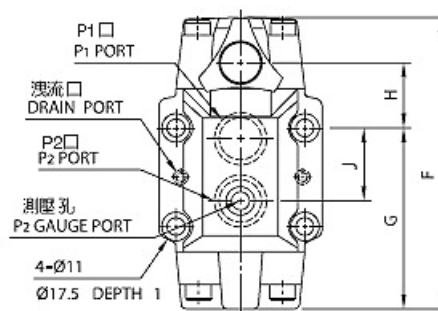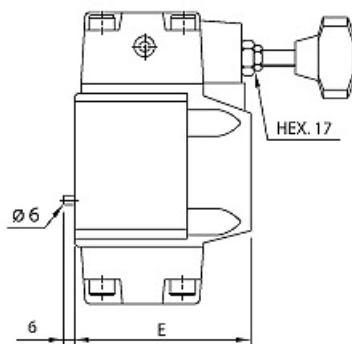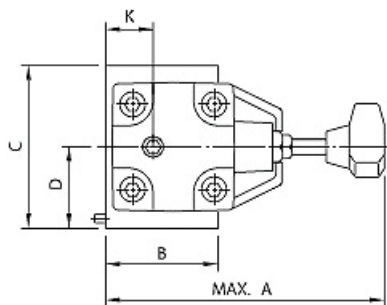


Model	A	B	C	D	E	F	G	H	J	K
RCG-03	164	61	90	45	88	155	92.4	45	34.9	25
RCG-06	164	70	104	52	109	182	111	40	48	21.5



RCG-10

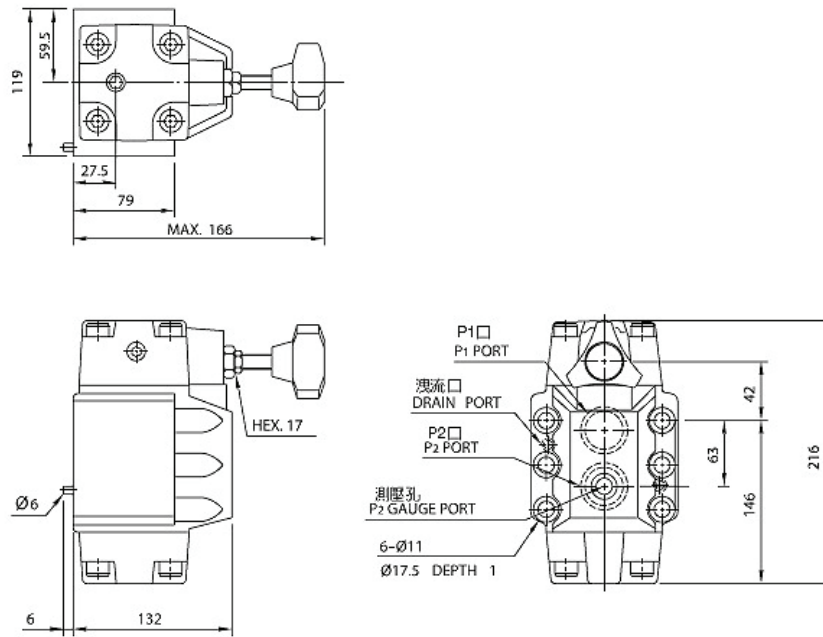

RCT-03

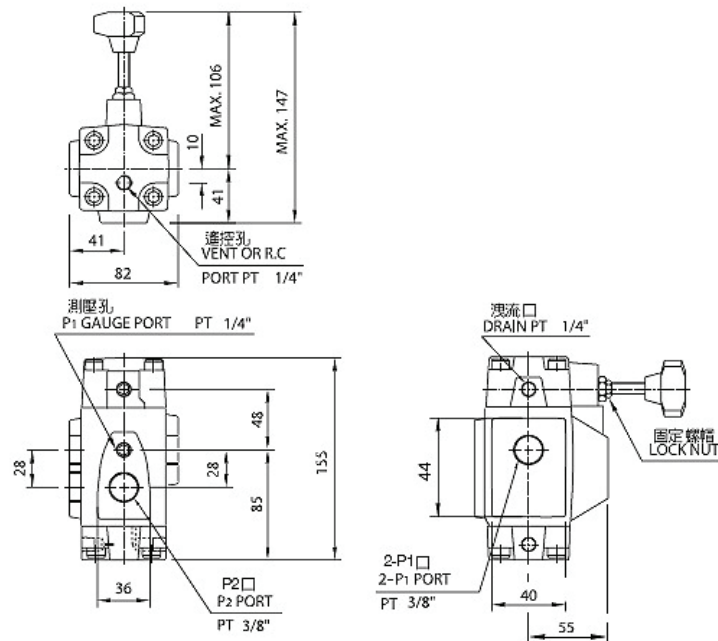

RCT-06,10

